

DPA 4063 Specifications

Directional pattern

Omnidirectional

Principle of operation

Pressure

Cartridge type

Pre-polarized condenser

Frequency range

20 Hz - 20 kHz

Frequency range, ± 2 dB

Soft boost grid: 20 Hz - 20 kHz, 3 dB soft boost at 8 - 20 kHz. High boost grid: 20 Hz - 20 kHz, 10 dB boost at 12 kHz

Sensitivity, nominal, ± 3 dB at 1 kHz

6 mV/Pa; -44 dB re. 1 V/Pa

Equivalent noise level, A-weighted

Typ. 26 dB(A) re. 20 μ Pa (max. 28 dB(A))

Equivalent noise level, ITU-R BS.468-4

Typ. 38 dB (max. 40 dB)

S/N ratio (A-weighted), re. 1 kHz at 1 Pa (94 dB SPL)

Typ. 68 dB(A)

Total harmonic distortion (THD) - Legacy

< 1% THD up to 123 dB SPL peak; < 1% THD up to 120 dB SPL RMS sine

Total harmonic distortion (THD) - CORE

< 1% THD up to 135 dB SPL peak

Dynamic range - Legacy

Typ. 97 dB

Dynamic range - CORE

Typ. 109 dB

Max. SPL, peak before clipping

138 dB

Output impedance

30 - 40 Ω

Cable drive capability

Up to 300 m (984 ft)

Power supply (for full performance)

For wireless systems: Min. 3 V - max. 50 V through DPA adapter. With DAD6001-BC/DAD6024/DAD4099: 48 V phantom power ± 4 V for full performance

Connector

MicroDot

Color

Black, beige, brown or white

Weight

7.5 g (0.26 oz) incl. Cable and MicroDot connector

Microphone diameter

5.4 mm (0.21 in)

Microphone length

12.7 mm (0.5 in)

Cable length

1.8 m (5.9 ft)

Polarity

Positively increasing sound pressure produces positive going voltage on MicroDot pin


Temperature range

-40°C to 45°C (-40°F to 113°F)

Relative humidity (RH)


Up to 90%

4063 Frequency response

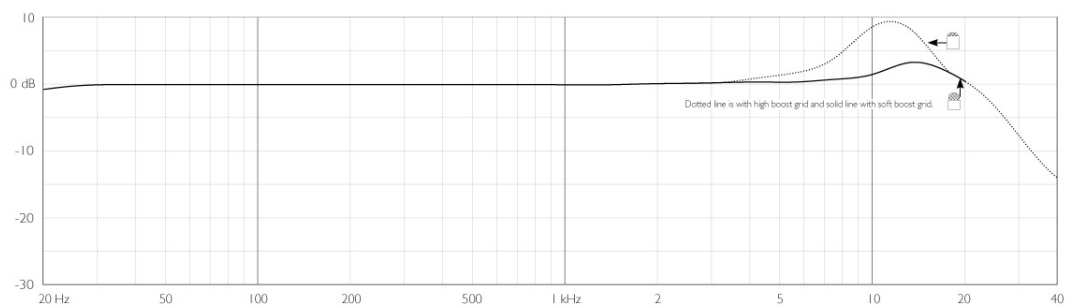

Typical response of a d:screet™ 4063

Polar pattern

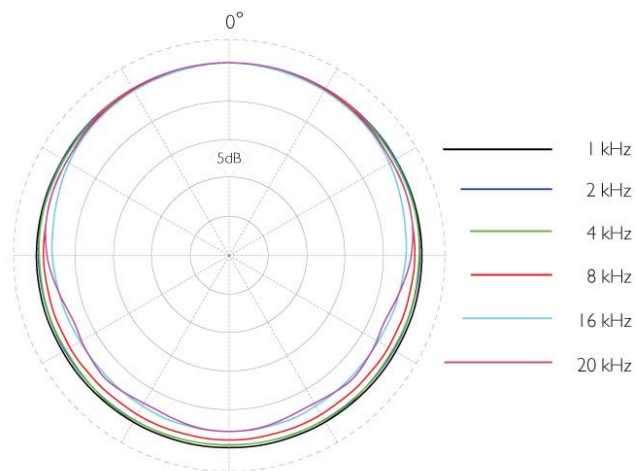

Typical directional characteristics of a d:screet™ 4063