


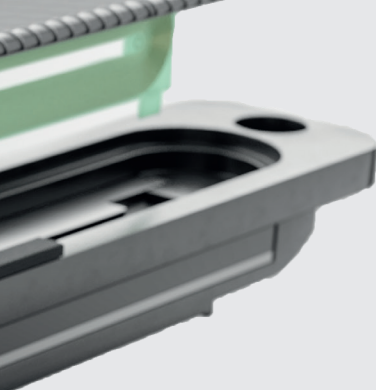

IC 70

► TECHNICAL DATA

Impedance	6 Ω
Frequency range	120 Hz - 20 kHz
System	Line array speaker
Broadband driver	3 x (20 x 120 mm)
Rated Power	30 W
Maximum power	60 W

► RADIATION

Radiation angle, horizontal	160°
Radiation angle, vertical	40°
Sensitivity	86 dB/W/m
Max. rated SPL	102 dB/W/m

► HOUSING

Material	Aluminium
Color	Black, white, silver, gold, special on request
Number of speakers	3
Mounting	Metal angle bracket (standard) In-Wall mounting On request
Permissible operating temp.	0 - 100 °C
Width	37,5 mm
Hight	698 mm
Depth	23 mm

