

# Specifications

## Directional characteristics

Supercardioid

## Frequency response

20 Hz - 20 kHz

## Effective frequency range, $\pm 2$ dB, 20 cm (7.9 in)

80 Hz - 15 kHz with 2 dB soft boost at 10 - 12 kHz

## Sensitivity, nominal $\pm 3$ dB at 1 kHz

16 mV/Pa; -36 dB re. 1 V/Pa

## Equivalent noise level, A-weighted

Typ. 23 dB(A) re. 20  $\mu$ Pa (max. 26 dB(A))

## Distortion (THD) <1%

130 dB SPL RMS, 133 dB SPL peak

## Dynamic range

Typ. 110 dB

## Max. SPL, THD 10%

135 dB SPL peak

## Connector

MicroDot


## Color

Black


## Dimensions

Weight: 10 g (.35 oz)

Microphone length: 10.4 cm (4 in)

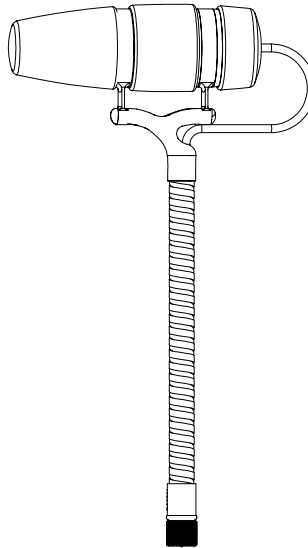

## Polar pattern

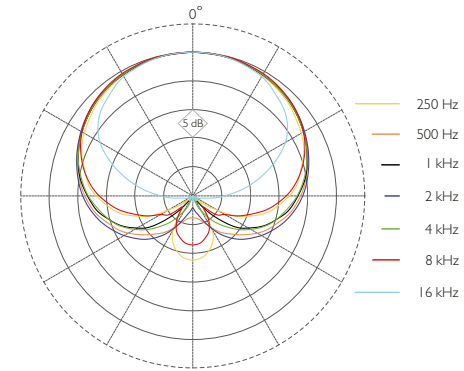

## Frequency response

Measured at 20 cm (7.9 in)

