

Jet Spot1

18 W moving spot with white LED source

ORDER CODE: JETSPOT1



Jet Spot1 is an extremely compact LED spotlight designed to deliver a bright, even beam from the smallest footprint possible. Ideal where space is an issue, the **Jet Spot1** simply offers the best value for money in its segment with a light output far exceeding expectations. All packaged in a compact size and offered at an affordable price.

MAIN FEATURES

- Ultra-efficient 18 W white LED with 16° glass optics, to deliver an outstanding light level and even beam
- Compact size for use where space is an issue – including clubs, bars, and events
- 9 colours and 9 gobos giving a vast range of effect options

TECHNICAL SPECIFICATION

LIGHT SOURCE

- Source: 18 W high-power white LED
- CCT: 7.000 K
- CRI: 73
- Luminous flux: 1'288lm
- Lux: 2'533 lx @3 m
- Lux: 227,97 lx @10 m
- Source life expectancy: > 30.000 h

OPTICS

- Beam angle: 16°
- Lens type: high-quality glass lens optics

COLOUR SYSTEM

- Colour wheel: 9 colour filters

DYNAMIC EFFECTS

- Fixed gobos: 9 fixed gobos + open
- Auto mode: built-in programs with execution speed adjustment
- Sound mode: music activation through internal microphone and sensitivity control

BODY

- Pan angle: 540°
- Tilt angle: 270°
- Pan/Tilt resolution: 8 / 16 bit
- Feedback: automatic repositioning after accidental movement
- Body: aluminium structure with hi-resistance polycarbonate cover
- Body colour: black, white finishing available

CONTROL

- Protocols: DMX512, RDM
- DMX channels: 8 / 10 channel
- W-DMX: optional, proprietary protocol compatible with WIFIBOX, WDBOX
- RDM: RDM ready for fixture remote monitor and settings
- Display: black OLED high resolution display
- Firmware upgrade: yes, via USB - DMX interface (UPBOX1) not included
- Master/Slave: for synchronized operation of more units linked in a chain

ELECTRONICS

- Dimmer: linear 0 ~ 100% electronic dimmer
- Strobe / shutter: 0 ~ 30 Hz, electronic
- Operating temperature: -10° ~ +45°
- Flicker: flicker free operation

ELECTRICAL

- Power supply: 100-240 V – 50/60 Hz
- Power consumption (at 230 V): 40,6 W
- Power consumption (at 120 V): 39,7 W
- Output (at 230 V): 67 units on a single power line
- Output (at 120 V): 37 units on a single power line

PHYSICAL

- Cooling: forced air with low noise fan
- Suspension and fixing: any position with quick-lock omega brackets
- Data: USB port for USB WIFI transmitter (optional)
- Signal connection: XLR 5p IN/OUT connectors
- Power connection: Seetronic powerCON IN/OUT connectors
- IP rating: 20
- Dimensions (WxHxD): 210x308x170 mm
- Weight: 4,2 kg


ACCESSORIES & RELATED PRODUCTS

- FCLJET1: Flight case for 8 pcs JETBEAM1 / JETSPOT1
- WIFUSB: USB Wi-Fi transceiver, compatible with WIFIBOX and WDBOX
- WIFIBOX: DMX controller interface, Wi-Fi/DMX IN, Wi-Fi / DMX OUT


- WDBOX: Wireless DMX Transceiver, IN/OUT 3-pin XLR, distance 200m, 2.4 GHz, 0.6 kg
- UPBOX1U: Firmware uploader kit, USB IN, 3-pin XLR DMX OUT, USB OUT

COLOUR PRESET FULL ON

Beam angle 2.5°

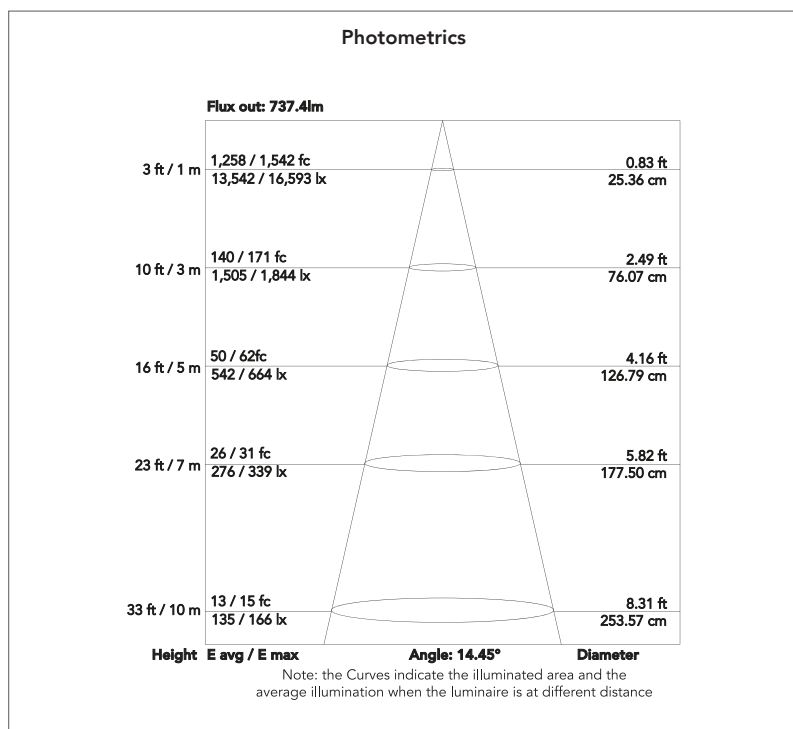

TECHICAL DRAWINGS

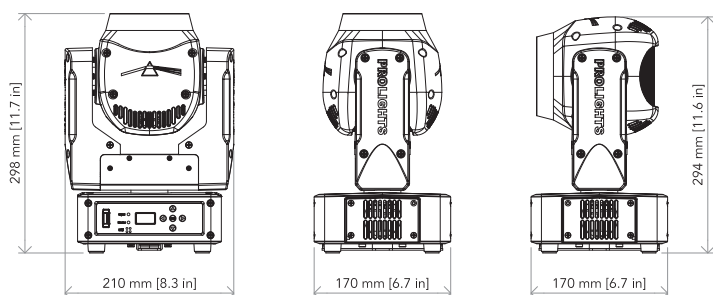

PROLIGHTS is a trademark of
MUSIC & LIGHTS S.r.l.
musiclights.it

Via A. Olivetti snc
04026 - Minturno (LT) ITALY
Tel: +39 0771 72190



For more product
info and downloads
visit our website



prolights.it
info@prolights.it