


Highlights:

- Stores up to 42 units of 19" Equipment
- in depth adjustable 19" profiles (max 1015 mm)
- Can carry a max load of 450 kg
- Unrestricted air flow due to open-frame design
- Punched square holes for use with snap-in cage nuts
- Easy assembly in 10 minutes
- Ships as flat-down package

The DPR942 is a professional and solid constructed 4-post open-frame rack for 19" equipment compliant to ANSI/EIA RS-310D, DIN41491 and IEC60297 standards. It offers a sturdy and low-cost solution, suitable for installing up to 42 units of 19" equipment. The open frame construction is made of 2.0 mm thick steel and finished in a black (RAL9004) powder coating with fine structure and printed unit measurement indicators. Adjustable vertical supports allow in depth adjustment within a range of 56 to 102 cm while the base angle profiles can be mounted outwards for increased stability or inwards for conserve floor space. Delivery in a flat-down package allows easy transportation of the rack to any installation location, while the simple structure allows assembly by a single person in a record-breaking time.

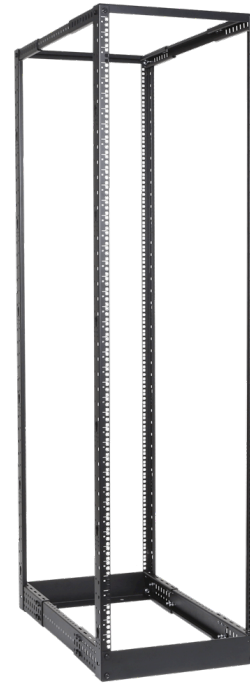

Product Features:

Unit height	42 HE
Max. usable depth	550 ~ 1015 mm
Max. load	450 kg
Dimensions	514 x 2006 x 560 ~ 1020 mm (W x H x D)
Weight	24.500 kg
Colours	Black (RAL9004)